


maxxOne WIRELESS SMART DOOR CONTACT

LAN ♦ WIFI ♦ CELLULAR

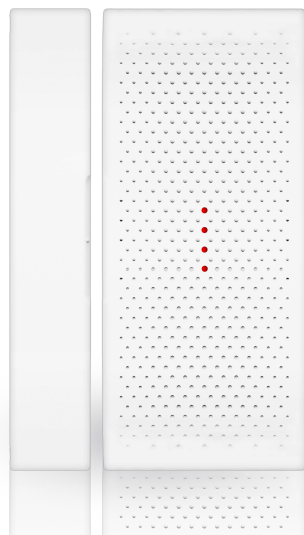

FEATURES

SECURE ALL ENTRY POINTS TO YOUR PROPERTY WITH KITE WIRELESS SMART DOOR CONTACT.

SIMPLY ATTACH YOUR SMART DOOR CONTACT TO ANY POINT OF ENTRY ON YOUR PROPERTY AND PAIR TO YOUR KITE SMART ALARM SYSTEM FOR INSTANT SECURITY.


THIS SENSOR SUPPORTS ENTRY DELAY, HOME ARM AND READY TO ARM FEATURES,

ALL AVAILABLE TO ADJUST IN THE KITE APP.

INSTALLATION IS QUICK AND EASY.

Note: Requires Kite Main Panel to function. May not be compatible with alternate alarm systems.

TOTAL COVERAGE

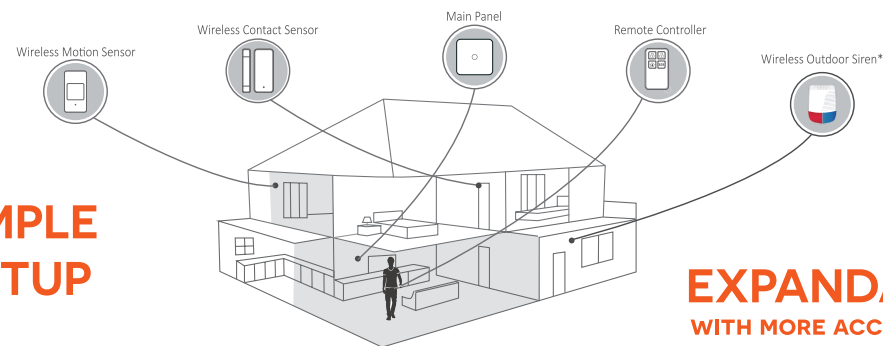

**SIMPLE
SETUP**

**EXPANDABLE
WITH MORE ACCESSORIES**

INCREASE THE SECURITY OF YOUR HOME WITH EASE, WITH THE WIRELESS MAXXONE KITE ALARM SYSTEM.

BE ALERTED DIRECTLY ON YOUR MOBILE DEVICE.

	MODEL	M1S-KACS-02
GENERAL	Working Voltage	DC 3V
	Battery	1 × CR2032 button battery (3V)
	Working Current	20mA
	Standby Current	2µA
	Transmission Distance	Without obstacle 200m
	Transmission Frequency	433.92MHz
	Working Temperature	-10°C~40°C
	Humidity	≤90%rh (non-condensing)
	Weight	35.5g(battery not included) 40g(battery included)
	Dimension	Transmitter: 80.0mm*38.2mm*13.3mm Magnet: 80.0mm*14.8*12.9mm



AVAILABLE NOW

CONTACT YOUR DISTRIBUTOR FOR MORE DETAILS.

